


AIR & MULTIPURPOSE

AIR &
MULTIPURPOSE
General Purpose
Heavy Duty
Push-on

HORIZON®

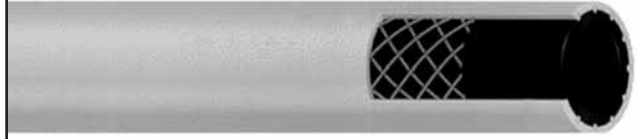

Product Specifications

APPLICATION:	An economical air and water hose, Horizon® is for a wide range of industrial, construction and agricultural applications. Available in 200, 250, and 300 PSI working pressures.	
CONSTRUCTION		
TUBE:	Versigard® synthetic rubber, RMA Class C (Limited Oil Resistance)	
COVER:	Black, Red, Yellow, Green or Blue Versigard® synthetic rubber	
REINFORCEMENT:	Spiral synthetic yarn, 2" is braided	
TEMPERATURE:	-40°F to 190°F (-40°C to 88°C)	
PACKAGING:	3/16"–3/4"	500' reels, maximum 3 pieces, 50' increments
	1"	450' reels, maximum 3 pieces, 50' increments
	1¼"	400' reels, maximum 3 pieces, 50' increments
	1½"	300' reels, maximum 3 pieces, 50' increments
	2"	200', cartons, maximum 3 pieces, 50' increments
	Coupled assemblies available in 1/4", 3/8", 1/2", and 3/4" in red.	
COUPLINGS:	Contact fitting manufacturer for proper fitting recommendation and coupling procedure.	
BRANDING:	Example: 1/2" Horizon® Goodyear® 300 psi WP.	
NON-STOCK/SIZES:	Refer to page 303 for special production run minimum requirements.	
ORDER CODES:	See next page.	

Versigard® is a registered trademark of The Goodyear Tire & Rubber Company.

CHEMICAL
TRANSFER

CLEANING
EQUIPMENT

FOOD
Transfer
Washdown

MARINE

MATERIAL
HANDLING
Abrasives
Bulk Transfer
Cement & Concrete

MINING

PETROLEUM
Aircraft Fueling
Dispensing
Dock
Transfer

SPRAY

STEAM

VACUUM

VEYANCE

WATER
Discharge
Suction &
Discharge
Washdown

WELDING

COUPLING
SYSTEMS

APPENDIX

GOODYEAR
ENGINEERED PRODUCTS

AIR & MULTIPURPOSE

AIR & MULTIPURPOSE

General Purpose

Heavy Duty
Push-on

CHEMICAL
TRANSFER

CLEANING
EQUIPMENT

FOOD
Transfer
Washdown

MARINE

MATERIAL
HANDLING

Abrasives
Bulk Transfer
Cement & Concrete

MINING

PETROLEUM
Aircraft Fueling

Dispensing
Dock
Transfer

SPRAY

STEAM

VACUUM

VEYANCE

WATER
Discharge
Suction &
Discharge
Washdown

WELDING

COUPLING
SYSTEMS

APPENDIX

HORIZON[®] 200

ORDER CODES: 536-035 (2" black)
569-011 (red)

536-040 (2" red)
569-038 (yellow)

569-009 (black)
569-547 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi	Mpa	lb./ft.	kg./m..
3/16	4.8	0.44	11.2	200	1.38	0.08	0.12
1/4	6.4	0.50	12.7	200	1.38	0.09	0.13
5/16	7.9	0.58	14.7	200	1.38	0.12	0.18
3/8	9.5	0.67	17.0	200	1.38	0.15	0.22
1/2	12.7	0.81	20.6	200	1.38	0.20	0.30
5/8	15.9	0.97	24.6	200	1.38	0.27	0.40
3/4	19.1	1.12	28.5	200	1.38	0.34	0.51
1	25.4	1.44	36.8	200	1.38	0.54	0.80
1¼	31.8	1.73	44.0	200	1.38	0.75	1.12
1½	38.1	1.98	50.3	200	1.38	0.86	1.28
2	50.8	2.50	63.5	200	1.38	1.16	1.73

HORIZON[®] 250

ORDER CODES: 569-010 (black)
569-506 (green)

569-012 (red)
569-548 (blue)

569-039 (yellow)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi	Mpa	lb./ft.	kg./m..
1/4	6.4	0.53	13.5	250	1.72	0.11	0.16
5/16	7.9	0.59	15.0	250	1.72	0.13	0.19
3/8	9.5	0.70	17.8	250	1.72	0.17	0.25
1/2	12.7	0.84	21.3	250	1.72	0.22	0.33
5/8	15.9	0.98	24.9	250	1.72	0.27	0.40
3/4	19.1	1.14	29.0	250	1.72	0.35	0.52

HORIZON[®] 300

ORDER CODES: 569-516 (yellow)

569-557 (red)

569-560 (green)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi	Mpa	lb./ft.	kg./m..
1/4	6.4	0.53	13.5	300	2.07	0.10	0.15
3/8	9.5	0.70	17.8	300	2.07	0.17	0.25
1/2	12.7	0.84	21.3	300	2.07	0.22	0.33
3/4	19.1	1.15	29.2	300	2.07	0.37	0.55
1	25.4	1.48	37.3	300	2.07	0.58	0.86

