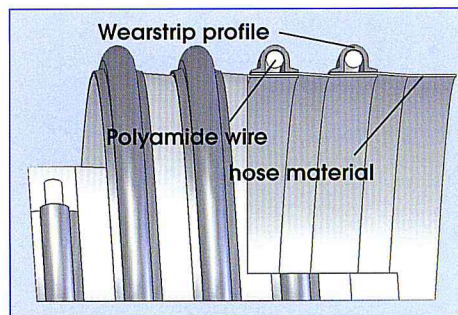


FLEXADUX® P-G-EX 1

Light weight and very flexible exhaust gas ducting of TPE-coated-polyester fabric

**Material:**

TPE-coated-polyester fabric.

Helix:

PA 6.6, heat-stabilized.

Wear Strip Profile:

TPE.

Temperature Resistance:

- 40° up to + 150° C (intermittent + 170° C).

Colour:

Black, coloured profile available upon request.

Single Length:

Up from 2,5 to 20 m available.

Applications:

Suction of exhaust gases in over-floor applications with reel systems or suction channels.

Properties:

Excellent chemical resistance, especially against oil and petrol fumes, crush recoverable.

Special construction:

P-G-EX 2 - with spring steel wire.

TECHNICAL DATA

2.11

Dia. mm	Weight kg/m	Mat. Thickness mm	Bend. Rad. mm	Max. Vacuum bar
40	0,25	0,4	80	0,65
50	0,41	0,4	85	0,50
65	0,53	0,4	100	0,35
75	0,69	0,4	105	0,15
90	0,83	0,4	175	0,12
100	0,87	0,4	190	0,10
125	1,20	0,4	250	0,08
150	1,44	0,4	300	0,06
200	1,83	0,4	400	0,04

Further diameters available upon request.

Technical data are based on + 20° C.



SCHAUBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · P.O. Box 10 18 54 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74