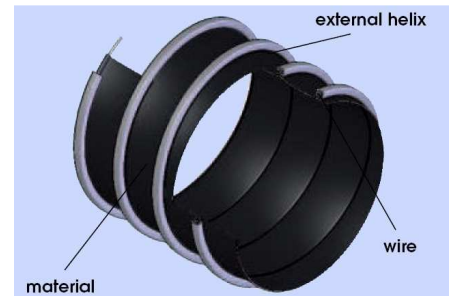


FLEXADUX[®] Neoprene[®] CL

Light weight and very flexible
Neoprene[®] ducting

**Material:**

Neoprene[®]- coated polyester fabric

Colour:

Black

Single Length:

3 and 6 metres,
Special lengths available upon request.

Temperature Resistance:

-55°C up to +150°C.

Applications:

Suction and conveyance of air, fumes
and gases, air-conditioning and
ventilation

Properties:

Flame retardant, excellent UV-
resistance, rot-proof, vibration proof,
maintains flexibility at low temperatures,
good chemical resistance.

Available on request:

- outer wear strip.

Technical Data

dia./ mm	Weight kg/ m	Bend. Rad. mm	max. Work. Press. bar	max. Vacuum bar
50	0,40	30	0,85	0,40
60	0,48	36	0,78	0,28
76	0,60	45	0,60	0,17
80	0,62	48	0,58	0,16
102	0,65	60	0,50	0,10
110	0,70	66	0,48	0,08
120	0,72	72	0,35	0,06
127	0,80	75	0,32	0,06
152	0,90	90	0,22	0,04
160	0,94	96	0,21	0,04
180	1,05	108	0,17	0,03
203	1,21	120	0,15	0,02
254	1,70	175	0,10	0,01
305	2,13	210	0,07	0,01
350	2,50	245	0,06	0,01
407	3,15	280	0,05	0,01
508	4,15	400	0,04	0,01

Further diameters upon request.

Technical data are based on + 20°C.